NEWAGE GLASS AND ALUMINIUM PTY LTD

PRODUCT BROCHURE
COMMERCIAL DOORS

Made to measure in Smeaton Grange NSW

Hawkesbury Top Hung Sliding Door

A top hung aluminium sliding door on Centor Architectural hardware, with a step free threshold and panels up to 300kg. Built for shops, offices and premium homes from our Smeaton Grange workshop.

3000mm	2500mm	300kg	AS 1428.1
Maximum panel height	Maximum panel width	Panel weight rating	Wheelchair compliant sill

About the Door

No bottom track to trip on or clog. Centor top rolling hardware glides easily.

Every door is built to your exact opening at our Blackmore Road workshop in Smeaton Grange. You choose the layout, glass, colour and screens, and the same team that builds it installs it.

Installed across Macarthur


Smeaton Grange · Oran Park · Gregory Hills · Harrington Park · Gledswood Hills · Narellan · Minto · Campbelltown

Key Features

- Powered by exclusive **Centor Architectural** hardware, with top rolling hardware for smooth, trouble free operation
- **AS1428.1 wheelchair compliant** sill for a step free threshold
- Double glazing option accepts up to a **28mm IGU**
- Tile insert threshold option
- Large sliding panels, ideal for residential and commercial applications
- 90 degree post free corner option
- Heavy duty rollers up to **300kg per panel**



Cafe frontage top hung Macarthur

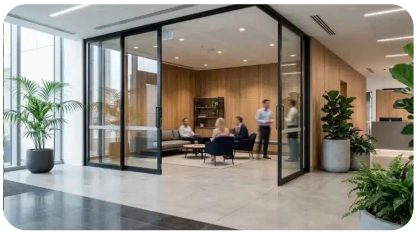

Office lobby top hung Macarthur



Commercial fitout Campbelltown

Made locally

Built at our Smeaton Grange workshop, so lead times stay short.

One team

Measured, made and installed by the same people, start to finish.

Free measure

A fixed price quote after we measure your opening on site.

Hawkesbury Top Hung Sliding Door Specifications

Sizes, glass, hardware and options at a glance.

NEWAGE GLASS AND ALUMINIUM PTY LTD

Technical Data

Frame Dimensions	**2 Track:** 124 x 45 mm **3 Track:** 186 x 45 mm
Maximum Product Performance	**SLS:** 1400 Pa **ULS:** 2700 Pa **Water:** 200 Pa
Maximum Recommended Sizes	**Height:** 3000 mm **Sash Width:** 2500 mm **Weight:** 300 kg per panel
Acoustic Performance	**6.38mm Laminate:** Rw 29 **6.38/12/6.5mm IGU:** Rw 32
Thermal Performance	**Uw range SG:** 4.5 to 6.2 **SHGC range SG:** 0.26 to 0.59 **Uw range DG:** 3.2 to 4.0 **SHGC range DG:** 0.25 to 0.52
Glazing Details	**Single Glazed:** 6 to 13.5 mm **Double Glazed:** 18 to 28 mm

Options & Uses

Frame and hardware

- 2 track or 3 track frames
- Tile insert threshold
- 90 degree post free corner
- Powder coat or anodised finish

Glass and screens

- Single glazing from 6 to 13.5mm
- Double glazing from 18 to 28mm
- Toughened and laminated safety glass
- Low E units for thermal control


Suited to

- Cafe and restaurant frontages in Narellan and Camden
- Office lobbies and commercial fitouts in Campbelltown
- Accessible entries that need a flush threshold
- Premium homes with oversized openings


Tested Standards

AS 1428.1


Popular Configurations




XO
2 panels, 1 sliding



OX
2 panels, 1 sliding



OXX
3 panels, 2 sliding



OXXO
4 panels, centre opening

Viewed from outside. X = sliding panel, O = fixed panel. Custom layouts available on request.

Colour Options

Pearl White | Surfmist | Ultra Silver | Woodland Grey | Monument | Satin Black

Full powder coat and anodised range available. Colours are a guide only, ask to see a physical sample.

Ready to price your opening?

Free measure and quote.
Mon to Fri 8am to 5pm, Sat 8am to 1pm.

Find us on Google Maps

0408 585 846
info@newagewindowsupplier.com.au

Specifications are based on the system manufacturer's published data and may vary with size, glass type and wind rating. Final specifications are confirmed in your written quote. Newage Glass and Aluminium P/ L, Unit 2/16 Blackmore Rd, Smeaton Grange NSW 2567.