NEWAGE GLASS AND ALUMINIUM PTY LTD

PRODUCT BROCHURE
COMMERCIAL WINDOWS

Made to measure in Smeaton Grange NSW

Viewmax Commercial Sliding Window

A commercial Alspec sliding window with a large glass area and strong wind and water ratings, for offices, schools and multi storey residential. Made to measure in Smeaton Grange.

6000 Pa	600 Pa	1600 mm	18 mm
Ultimate wind load (ULS)	Water resistance	Maximum sash height	Double glazed unit

About the Window

Large glass area for light and views. Suits 76mm and 101.6mm framing.

Every window is built to your exact opening at our Blackmore Road workshop in Smeaton Grange. You choose the layout, glass, colour and screens, and the same team that builds it installs it.

Installed across Macarthur


Smeaton Grange · Oran Park · Gregory Hills · Harrington Park · Gledswood Hills · Narellan · Minto · Campbelltown

Key Features

- **Large glass area** maximises natural light and visibility
- Developed specifically for multi storey residential, schools and architecturally designed housing
- 4mm up to 10.38mm monolithic glass and up to 18mm double glazed units
- Minimal maintenance, easy to clean and maintain
- Commercially designed to suit 76mm and 101.6mm framing
- Superior thermal, acoustic and weather performance (refer to test reports)
- Minimal processing, cost effective and simple fabrication



Commercial fitout — Macarthur

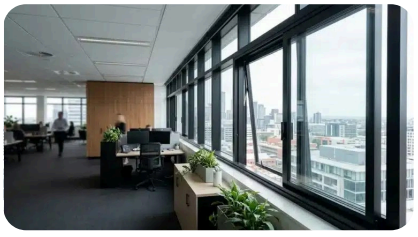

Office elevation sliding — Macarthur



Cafe commercial sliding — Macarthur

Made locally
Built at our Smeaton Grange workshop, so lead times stay short.

One team
Measured, made and installed by the same people, start to finish.

Free measure
A fixed price quote after we measure your opening on site.

Viewmax Commercial Sliding Window Specifications

Sizes, glass, hardware and options at a glance.

NEWAGE GLASS AND ALUMINIUM PTY LTD

Technical Data

Frame Dimensions	**Option 1:** 76 x 35 mm **Option 2:** 101.6 x 44.5 mm
Maximum Product Performance	**SLS:** 2000 Pa **ULS:** 6000 Pa **Water:** 600 Pa
Maximum Recommended Sizes	**Height:** 1600 mm **Sash Width:** 1200 mm **Weight:** 50 kg
Acoustic Performance	**Glass Type:** Rw (C; Ctr) dB **6.38mm Laminate:** 31 (-0, -2) **10.38mm / 12 / 6.38mm IGU:** 34 (-1, -3)
Thermal Performance	**Uw range SG:** 4.7 to 6.6 **SHGC range SG:** 0.28 to 0.69 **Uw range DG:** 3.2 to 4.4 **SHGC range DG:** 0.16 to 0.6
Glazing Details	**Single Glazed:** 4 to 10.38 mm **Double Glazed:** 18 mm
Compatible Systems	Derwent 76mm Centre Pocket Framing McArthur Evo Centre Pocket Framing ecoFRAMEplus Centre Pocket Double Glazed Framing

Options & Uses

Frame and hardware

- 76 x 35mm or 101.6 x 44.5mm frames
- Derwent, McArthur Evo or ecoFRAMEplus framing
- Commercial sash locks
- Powder coat or anodised finish


Glass and screens

- Single glazing from 4 to 10.38mm
- Double glazing at 18mm
- Laminated acoustic glass
- Low E coated units


Suited to

- Office elevations and commercial fitouts in Campbelltown
- Schools and education buildings


Popular Configurations



XO
Left sash slides



OX
Right sash slides



XOX
Both ends slide



OXO
Centre sash slides

Viewed from outside. X = sliding sash, O = fixed pane.

Colour Options

Pearl White | Surfmist | Ultra Silver | Woodland Grey | Monument | Satin Black

Full powder coat and anodised range available. Colours are a guide only, ask to see a physical sample.

Ready to price your opening?

Free measure and quote.
Mon to Fri 8am to 5pm, Sat 8am to 1pm.

Find us on Google Maps

0408 585 846
info@newagewindowsupplier.com.au

Specifications are based on the system manufacturer's published data and may vary with size, glass type and wind rating. Final specifications are confirmed in your written quote. Newage Glass and Aluminium P/ L, Unit 2/16 Blackmore Rd, Smeaton Grange NSW 2567.