NEWAGE GLASS AND ALUMINIUM PTY LTD

PRODUCT BROCHURE
COMMERCIAL DOORS

Made to measure in Smeaton Grange NSW

Hawkesbury Multifold Door

A top rolling aluminium bifold door on Centor hardware that folds right back to open whole walls. Built for cafes, venues and premium homes at our Smeaton Grange workshop.

3000 mm	1200 mm	115 kg	28 mm
Maximum panel height	Maximum panel width	Panel weight rating (E3A)	Double glazed unit

About the Door

Opens almost the full width of the opening. Weatherseal technology for wind and rain.

Every door is built to your exact opening at our Blackmore Road workshop in Smeaton Grange. You choose the layout, glass, colour and screens, and the same team that builds it installs it.

Installed across Macarthur


Smeaton Grange · Oran Park · Gregory Hills · Harrington Park · Gledswood Hills · Narellan · Minto · Campbelltown

Key Features

- Smooth top rolling operation
- Weatherseal technology keeps wind, rain and cold air where it belongs
- The stabilising centre hinge controls door stile deflection and bowing on tall doors
- **Surelock** system allows for simple vertical height adjustment when needed
- Uncompromised security with flush bolts and proprietary door furniture
- Accepts from 6mm to 13.5mm single glazed and up to **28mm double glazed** units for demanding thermal and acoustic specs
- Concealed carriers under door panels, minimising open tracks for debris to collect



Training room multifold — Macarthur

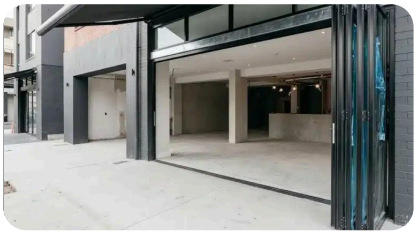

Multifold install fitout — Narellan



Restaurant terrace — Macarthur

Made locally
Built at our Smeaton Grange workshop, so lead times stay short.

One team
Measured, made and installed by the same people, start to finish.

Free measure
A fixed price quote after we measure your opening on site.

Hawkesbury Multifold Door Specifications

Sizes, glass, hardware and options at a glance.

NEWAGE GLASS AND ALUMINIUM PTY LTD

Technical Data

Frame Dimensions	**Frame:** 101.6 x 44.5 mm
Maximum Recommended Sizes	**Height:** 3000 mm **Width:** 1000 mm (E2A) / 1200 mm (E3A) **Weight:** 60 kg (E2A) / 115 kg (E3A)
Acoustic Performance	**6.38mm Laminate:** 29 dB **10.38/12/6.38mm IGU:** 34 dB (25mm Optimal IGU)
Thermal Performance	**Uw range SG:** 4.4 to 6.2 **SHGC range SG:** 0.26 to 0.59 **Uw range DG:** 3.2 to 4.0 **SHGC range DG:** 0.15 to 0.51
Glazing Details	**Single Glazed:** 6 to 13.5 mm **Double Glazed:** 18 to 28 mm
Compatible Systems	McArthur Evo Centre Pocket Framing Hunter Evo Flush Glazed Framing ecoFRAMEplus Centre Pocket Double Glazed Framing

Options & Uses

Frame and hardware

- Centor E2A or E3A top rolling hardware
- Stabilising centre hinge on tall doors
- Flush bolts and proprietary door furniture
- Powder coat or anodised finish


Glass and screens

- Single glazing from 6 to 13.5mm
- Double glazing from 18 to 28mm
- Laminated acoustic glass up to 34 dB
- Low E coated units


Suited to

- Restaurant and cafe frontages across Macarthur
- Alfresco and pool areas in Harrington Park and Gregory Hills
- Training rooms and function spaces
- Premium homes that want a fully open wall


Popular Configurations




3 panel
Folds to one side



4 panel
Folds to one or both sides



5 panel
Wide opening



6 panel
Full wall opening

Viewed from outside. Panel count and fold direction are designed to suit your opening.

Colour Options

Pearl White | Surfmist | Ultra Silver | Woodland Grey | Monument | Satin Black

Full powder coat and anodised range available. Colours are a guide only, ask to see a physical sample.

Ready to price your opening?

Free measure and quote.
Mon to Fri 8am to 5pm, Sat 8am to 1pm.

Find us on Google Maps

0408 585 846
info@newagewindowsupplier.com.au

Specifications are based on the system manufacturer's published data and may vary with size, glass type and wind rating. Final specifications are confirmed in your written quote. Newage Glass and Aluminium P/ L, Unit 2/16 Blackmore Rd, Smeaton Grange NSW 2567.